



MPHD

Multi-Purpose Heavy-Duty LED Light

MPHD	Wattage	Voltage	Optic	CCT	Mounting	Options
	200W = 200W / 24,000lm	LV = 90-305 VAC	15D = 15°	30K = 3000K	U = U-Bracket	G = Lens Guard
	300W = 300W / 36,000lm	HV = 180-528 VAC	20D = 20°	40K = 4000K	P = Pendant	V = Visor
	400W = 400W / 48,000lm		60D = 60°	50K = 5000K	S = Slip-Fit	D = Dimming
	500W = 500W / 60,000lm		120D = 120°	60K = 6000K		CTM = Custom
	600W = 600W / 72,000lm		140D = 140° x 60°			


OPERATION

Array Lifetime	100,000+ Hours
Driver Lifetime	50,000 Hours
Voltage	90 - 305 VAC 180 - 528 VAC (Optional)
Operating Temperature	-40°C to 50°C
Optimal Temperature	-40°C to 35°C
Power Factor	> 0.98
Frequency	50/60 Hz
Colour Rendering Index	>75


CERTIFICATIONS

Locations	Suitable for wet or dry locations
CSA Standards	CSA C22.2 No.250.0-08
UL Standards	UL 1598 (Edition 3) UL 8750 (Edition 1): 2009

Dimensions for 60°, 120°, 140°x 60°

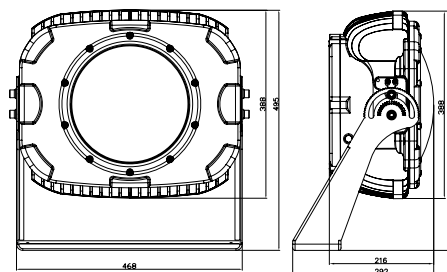

Dimensions for 15°, 20°

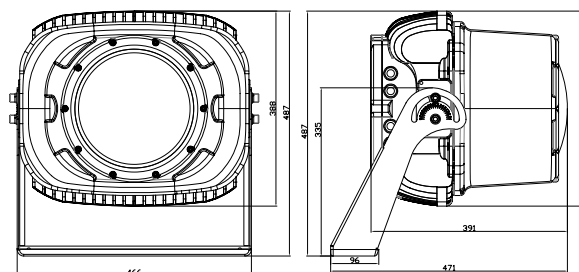

CONSTRUCTION

Housing	Heavy-Duty Construction Zinc-Coated Cast Aluminum
Lens	Tempered Glass
Enclosure Rating	IP67
Dimensions (L x H x D)	468mm x 388mm x 216mm 18.4" x 15.3" x 8.5"
Weight	15.0 kg 33.0 lb